

30W

Integrated Solar Street Light




| Technical parameters | | | |
|----------------------|----------------------|------------------|-----------------------------|
| Item No. | ZCIL-30 | Lamps material | Aluminum alloy |
| LED lamp | USA Bridgelux12V-30W | Solar panel | 18V-60W, mono |
| Lumen(lm) | 3000-3300 | Battery | LiFeO4, 12V21AH, 5 years |
| Color temperature | 6500-7000K | Human body sense | Yes |
| Viewing Angle | 120° | Charging time | 5~6hours |
| Life time | 50000hours | Disharging time | Saving power mode, ≥20hours |
| Working temp. | -20℃ ~+60℃ | Mounting height | 6~7m |
| Protection grade | IP65 | Light space | 18~20m |
| Product size | 1180*325*140mm | Packing size | 1190*400*220mm |
| Net weight | 18.5kg | Gross weight | 19kg |



New country side, Sichuan, China



New country side, Hubei, China

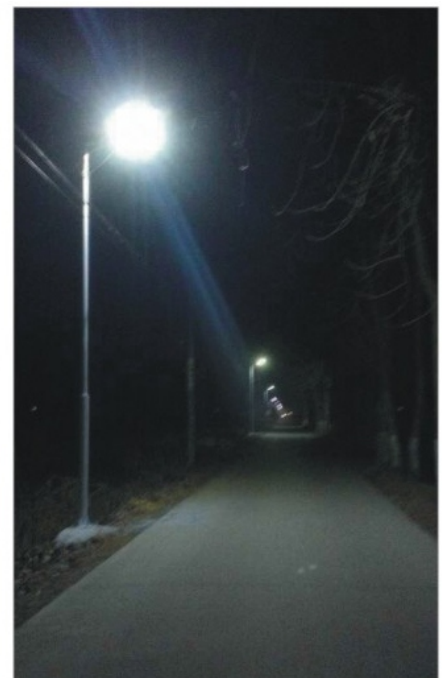

New contry side,Hunan, China(at night)