

# 15W

## Integrated Solar Street Light


Technical parameters			
Item No.	ZCIL-15	Lamps material	Aluminum alloy
LED lamp	USA Bridgelux 12V-15W	Solar panel	18V-30W, mono
Lumen(lm)	1500-1650	Battery	LiFeO4, 12V10AH, 5 years
Color temperature	6500-7000K	Human body sense	Yes
Viewing Angle	120°	Charging time	5~6hours
Life time	50000hours	Disharging time	Saving power mode, ≥20hours
Working temp.	-20℃ ~+60℃	Mounting height	4~5m
Protection grade	IP65	Light space	10~15m
Product size	670*350*50mm	Packing size	750*450*150mm
Net weight	8.5kg	Gross weight	9kg



Shanxi new country side, China



Hennan residential, China

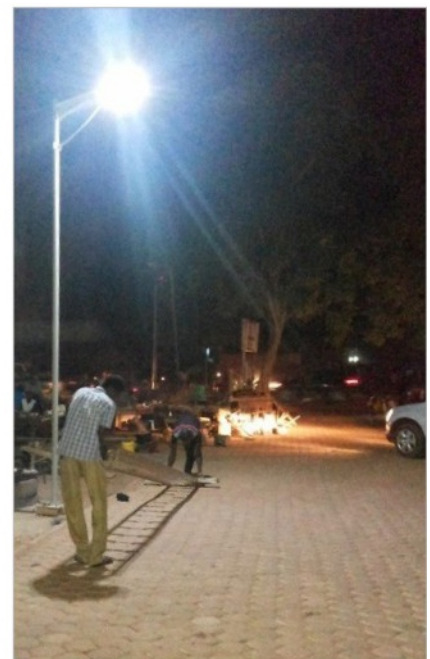

West Africa